QuickFit[™]Strap


by CLICK



Revised 2022

2 Check strap position.


Important: Add optional QuickFit[™] Buckle if desired before continuing to step 3 (see other side for instructions)



Wrap strap around body to determine strap length.



6 Push to engage dial. Twist to tighten.




QuickFit™ Strap Fitting Instructions

Kit Contents QuickFit™ strap x 1


38 mm/1.5" - OK1410-130-05




1 Install Velcro® at edges of device.

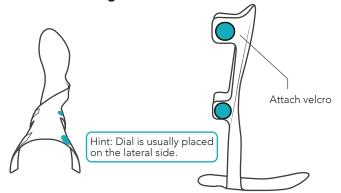


3 Position tunnel opening at edge of desired closure.

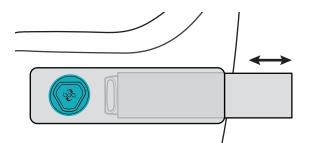

5 Cut tail of strap to size at dial.

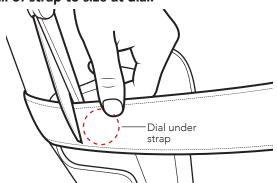


7 Pull up on dial to release tension. Lift tab to release.

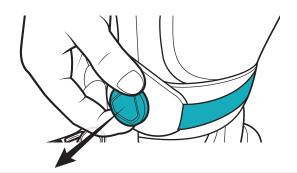

QuickFitTM Buckle Add-On Instructions by CLICK 1" 1.5"


1" / 25mm OK1405-000-05 1.5" / 38mm OK1415-000-05 2" / 50mm OK1425-000-05

1 Install QuickFit™ buckle to device with included Velcro® tabs.

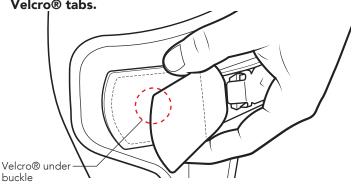

2 Attach QuickFit[™] strap.


a. Insert tab through back of first bar.




b. Loop tab back through adjustment bar.



c. Secure tab to back of tunnel.

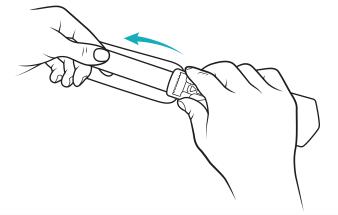


3 Cut to size, attach tail of strap to buckle.

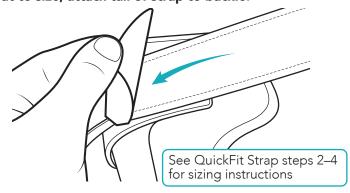


4 a. Close strap at self-securing buckle.

b. Push to engage. Twist clockwise to tighten.

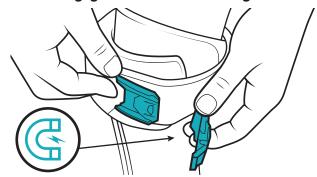

To Release Strap

1 Pull up dial for quick release.

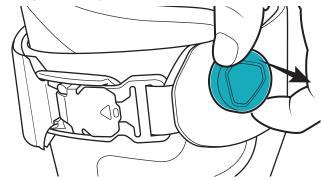

2 Pull tab to open.

