



Mechanical MAGLOCK

The MAGLOCK eases the frustration of donning a pin lock liner for TF and TT patients K1 to K3. The MAGLOCK is developed to deliver up to 90lbs of suspension force. The large distal target allows the patient to be 10 degrees off center and still achieve suspension. The MAGLOCK stops socket rotation and creates a new type of suspension.

The ultimate product for patients who have dexterity issues, issues with pin alignment, requires a caregiver and much more.



P/N	Description	Weight Limit	Product Weight	Build Height	Suspension Strength
3180M	Mechanical MAGLOCK	136kg	278g	2.2cm	90lbs



Fabrication Dummy for Mechanical MAGLOCK

P/N	Description
3180-1M	Dummy for Mechanical MAGLOCK



Distal Cap Converter for All Pin Liners

Cap Converter with 10mm thread for all pin liners. The distal cap converter is required for use with other liners in order to be compatible with the MAGLOCK. Dummy is included.

P/N	Description
DSTC	Distal Cap Converter for all pin liners



EZ Adapt Lock

The 3190T EZLOCK is a titanium adapter with a male pyramid on one end and the threaded pylon on the opposite end. This titanium lock adapter gives the ultimate advantage in strength and versatility when space is limited. This light space saving device also gives the added benefit of rotation.

The 3190T EZLOCK is designed to work in conjunction with our bases 1421S, 1221S/T, 1223T. Please use laminating instruction for our bases.

You can use this lock with our EZ ADAPT components allow you to fabricate a socket much easier, providing modular versatility to shift and rotate as needed without any hassle!

EZLOCK spacer is provided to adjust to different laminating thickness. Simply screw in the EZLOCK into the base.

Be careful not to tighten onto the release button. Screw the spacer to the top of the EZLOCK from the inside of the socket. Remove any excess spacer that comes through the socket. Set screws should be torqued and thread locker applied after alignment is complete.



P/N	Description	Weight Limit	Product Weight	Build Height
3190T	Low Profile Lock	136kg	92g	25mm



Integra Clutch Lock

- ▶ Smooth gear mechanism
- ▶ All-in-one design
- ▶ Quiet operation
- ▶ Cost effective pricing
- ▶ Ideal for laminated sockets
- ▶ Warranty : 1 year

P/N	Description	Weight Limit
3130	Integra Clutch Lock	114kg



Threaded Clutch Lock

- ▶ Built-in pyramid
- ▶ Screw-in modular design provides easy maintenance when required
- ▶ Cost effective pricing
- ▶ Need to use with titanium or stainless steel 3-prong rotating base
- ▶ Warranty : 1 year

Three types are available :

3150T – Threaded clutch lock with titanium 3-prong rotating base

3150TF – Threaded clutch lock with titanium 4-prong rotating base


3150S – Threaded clutch lock with stainless steel 3-prong rotating base

P/N	Assembled Product	Weight Limit
3150T	1221T - Titanium	100kg
3150TF	1223T - Titanium	100kg
3150S	1221S - Stainless Steel	100kg



Fabrication Dummy Kit for Clutch Lock

P/N	Description
①3130-1	Fabrication Dummy Kit for Clutch Lock 3130
②3150-1	Fabrication Dummy Kit for Clutch Lock 3150

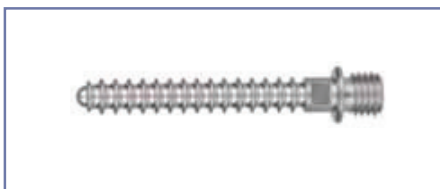

Pin for Clutch Lock

P/N	Description
CLP	Pin for Clutch Lock



SHIFT Clutch Lock

- ▶ Smooth gear and bearing mechanism for infinite adjustment
- ▶ Can be used for laminated and thermoplastic sockets
- ▶ Easily compensate for the variance between pin and socket alignment when use with the 4-hole plate
- ▶ Quiet operation
- ▶ 1 year warranty

P/N	Description	Weight Limit
①3160	Shift Clutch Lock	136kg
②3160P	Shift Clutch Lock w/Plate	136kg



SHIFT Shuttle Lock

- ▶ Serrated pin attachment
- ▶ Can be used for laminated and thermoplastic sockets
- ▶ Easily compensate for the variance between pin and socket alignment when used with the 4-hole plate
- ▶ 1 year warranty

P/N	Description	Weight Limit
①3170	Shift Shuttle Lock	136kg
②3170P	Shift Shuttle Lock w/Plate	136kg



BASE Shuttle Lock

- Versatile cylindrical body with a 4-hole attachment
- Serrated pin type attachment
- Deep pin well for easy insertion
- Cost effective pricing
- Warranty : 1 year

* Not included the dummy. Need to order separately. Please use 3140-1 for dummy ordering.

P/N	Description	Weight Limit
3140	BASE Shuttle Lock	100kg



Fabrication Dummy Kit for BASE Shuttle Lock

P/N	Description
3140-1	Fabrication Dummy Kit for BASE Shuttle Lock 3140



Pin for BASE Shuttle Lock

P/N	Description	Length
3140-SP	Short Pin for BASE Shuttle Lock 3140	2.5cm
3140-MP	Middle Pin for BASE Shuttle Lock 3140	4.0cm
3140-LP	Long Pin for BASE Shuttle Lock 3140	5.0cm



Shuttle Lock

- Serrated pin type attachment
- Deep pin well for easy insertion
- Cost effective pricing
- Warranty : 1 year

P/N	Description	Weight Limit
3195	Shuttle Lock	100kg



Pin for Shuttle Lock 3195

P/N	Description
3195-P	Pin for Shuttle Lock 3195